




DOP DIN PLUTA AGLOMERATA PENTRU SPUMANT



DOP CILINDRIC DE PLUTA MICROGRANULAT TOLERANTA

DIMENSIUNI : D = 30.5; H = 48 mm

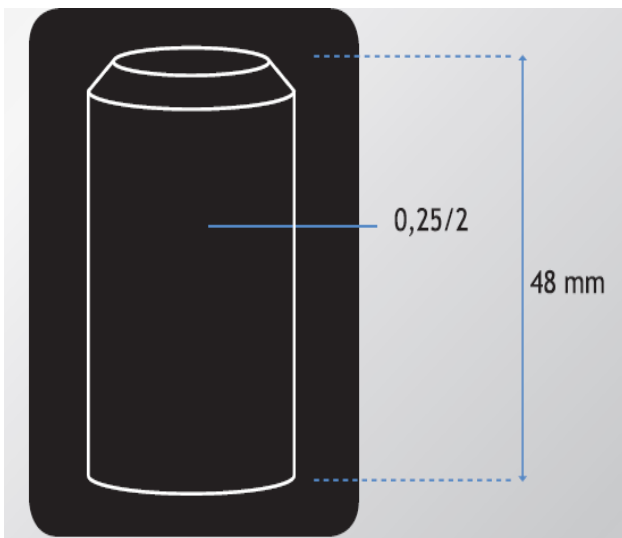

Inaltime :	± 0.3 mm
Diametru :	± 0.2 mm
Tesitura :	4 mm ± 0.5
Umiditate :	4 % - 8%
Densitate :	270 kg/m ³ $\pm 6\%$
Rezistenta la torsiune :	> 7.5 daN/cm ²
Unghiul de torsiune :	> 30°
Rezistenta la fierbere :	fara degradare
Etansare:	100% < 6 bar
Capacitatea de revenire :	dupa 5 min ≥ 90 % dupa 1 ora ≥ 92 %
Continut de praf/ dop :	≤ 0.001 g/dop
Bacterii aerobe :	< 30 U.F.C./ dop
Ciuperci si drojdii :	< 10 U.F.C./ dop
2.4.6 TCA Tricloranisol :	sub limite cuantificabile
PCA, TeCA, TBA :	sub limite cuantificabile
Examen olfactiv si gustativ :	absent

Teste realizate dupa normele UNE 56923, UNE 56930.