



## DOP DIN PLUTA AGLOMERATA PENTRU SPUMANT




### TOLERANTA

Inaltime :	$\pm 0.3$ mm
Diametru :	$\pm 0.2$ mm
Tesitura :	4 mm $\pm$ 0.5
Umiditate :	4 % - 8%
Densitate :	270 kg/m <sup>3</sup> $\pm$ 6%
Forta de extragere:	20 - 40 daN
Rezistenta la torsiune :	> 7.5 daN/cm <sup>2</sup>
Unghi de torsiune :	> 30 °
Rezistenta la fierbere :	fara degradare
Etansare:	100% < 6 bar
Capacitatea de revenire :	dupa 5 min $\geq$ 90 % dupa 1 ora $\geq$ 92 %
Continut de praf/ dop :	$\leq$ 0.001 g/dop
Bacterii aerobe :	< 30 U.F.C./ dop
Ciuperci si drojdii :	< 10 U.F.C./ dop
2,4,6 TCA :	$\leq$ 1.2 ng/l
PCA, TeCA, TBA :	la limita
Examen olfactiv si gustativ :	absent

### DOP CILINDRIC MICROGRANULAT

**DIMENSIUNI:** D = 30.5; H = 48 mm

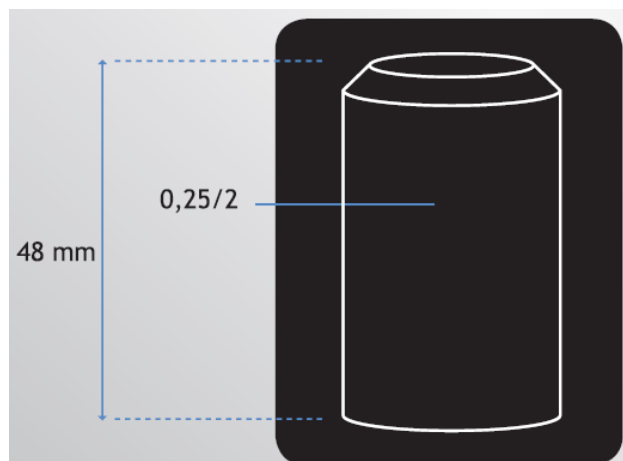

*Teste realizate dupa normele UNE 56923,  
UNE 56930.*

